

--	--	--	--



. □□□□ □□□□ □□□□□□□□ □□ □□ □□□□□□□□ □□ □□□□□□ □ □□□□□ □ □□□□□□□□ □□ □□□□□□□□ □□

. □□□□□ □□□□ □□ □□□□□□□□□□ □□□□□□□□□□ □□□□□□□□□□ □□□□□□□□□□ □□□□□□□□□□

: 0000 0000 00 00000000 0 000000 000000 000000 0 0 00000 00 00000

























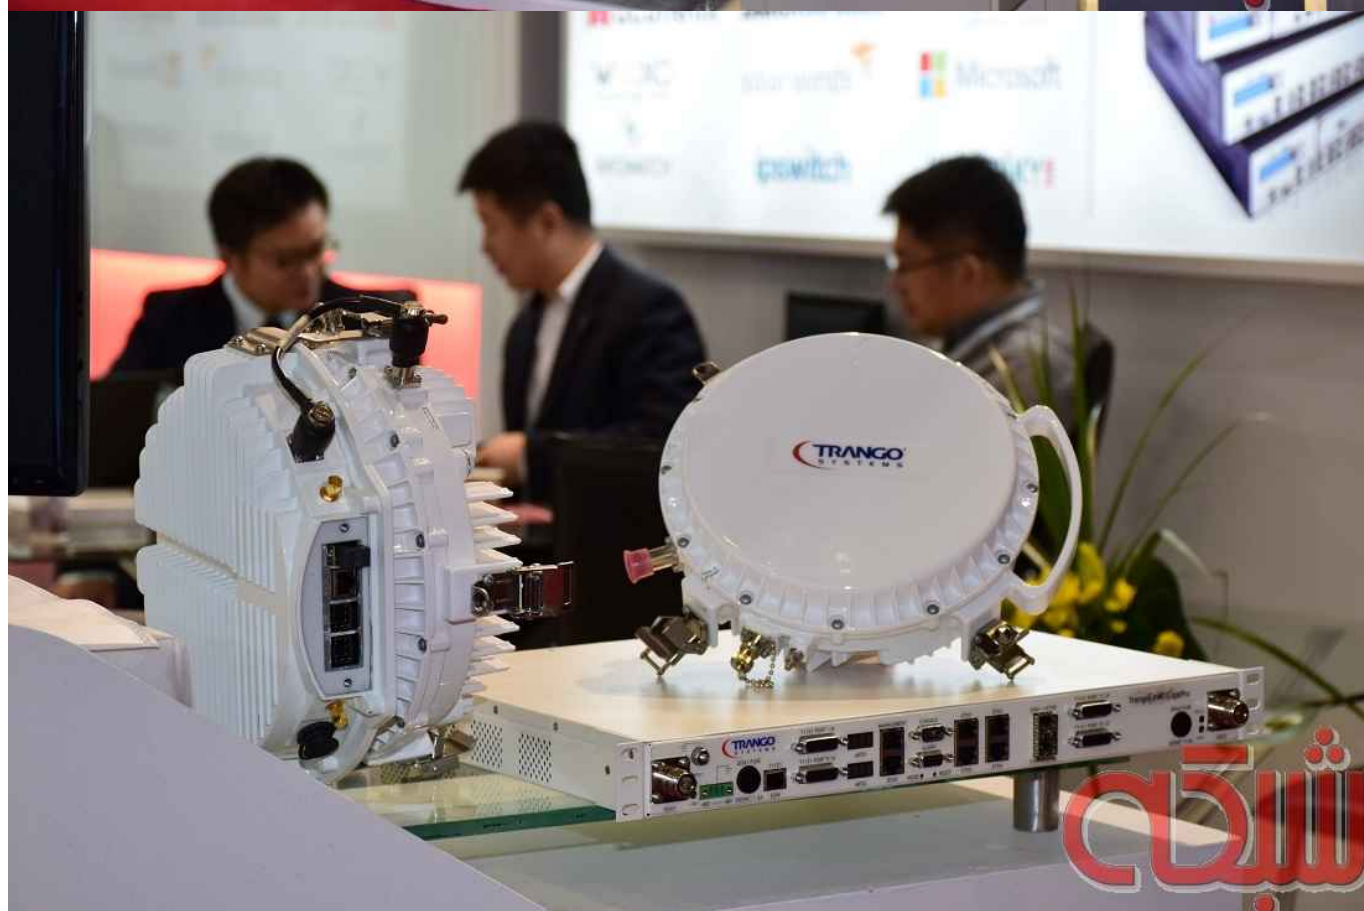

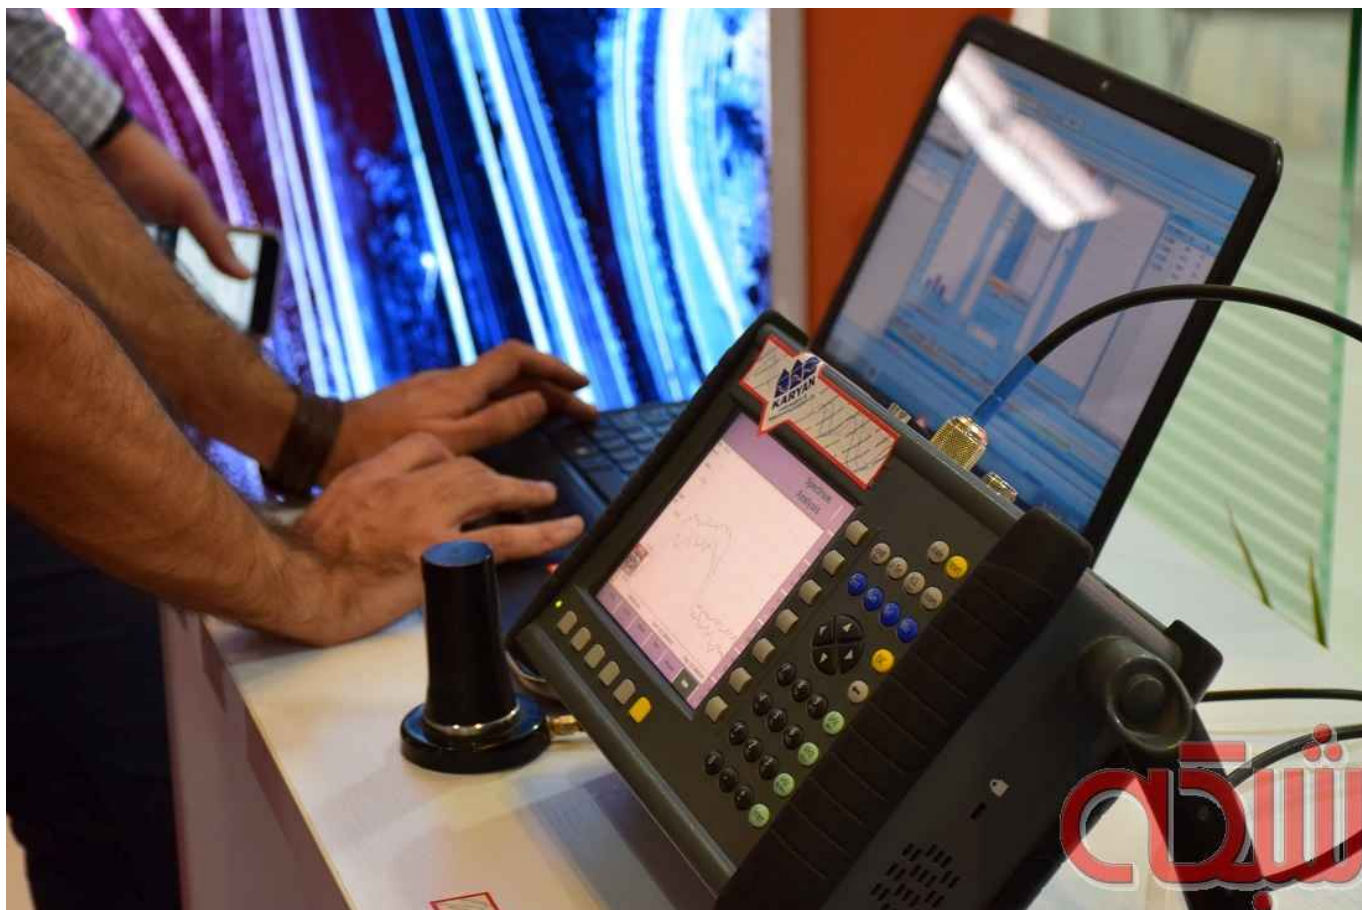














the handheld receiver provides...
When the manual bearing is used, the user determines the direction... until the
the incident signal and continuously follows this
signal source is reached.

Technical Specification

Receiver Frequency Range	300kHz~ 3GHz
HADF30500 active antenna	30 MHz
DF method	
Operating time	approx. 4 hours
Handheld receiver Dimensions	8 × 18 × 24 cm
Handheld receiver Weight	3.5 kg(including antenna)





:۰۰۰۰۰۰۰۰

۰۰۰۰۰۰۰۰ ۰۰۰۰۰۰

:۰۰۰۰ ۰۰۰۰

۰۰۰ ۰۰۰۰۰

:۰۰۰۰۰۰ ۰۰۰۰۰

21:35 - 04/07/1395

:۰۰۰۰۰

۰۰۰ ۰۰۰۰ - ۰۰۰۰۰۰۰ ۰۰۰۰ - ۰۰۰۰۰۰ - ۰۰۰۰۰۰ ۰۰۰۰۰۰ ۰۰۰۰۰۰ - 95 ۰۰۰۰۰ - ۰۰۰۰ ۰۰۰۰۰۰ ۰۰۰۰۰۰ - ۰۰۰۰۰

<https://www.shabakeh-mag.com/photo/4813>:۰۰۰۰ ۰۰۰۰۰